


Hot Tub Tee Adapter Assembly (TX60 Insert)

Note: The wet probe sensor can be used as a stand-alone product. Insert the probe wire into the water of your hot tub and secure the transmitter in an area that is protected from water. *The transmitter case is water resistant but not waterproof*

Mounting Tee Adapter with Hardware (optional use): Install the tee adapter with clamps and attach the 6 Ft. threaded stainless steel probe to measure water temperature in a hose.

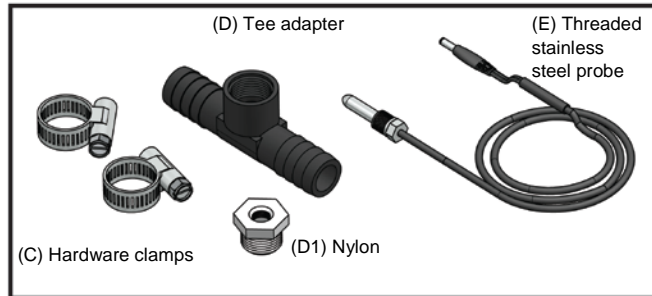

Caution! Do not alter or change your property until you have considered all options for installation. Assess your specific hot tub/spa construction to determine if additional plumbing supplies (not included) are necessary to install the probe within a hose.

Gather the tools and supplies you will need (not included):

- Teflon Tape
- Wrench or pliers
- Flat tipped screwdriver
- Tool to cut a hose

Assemble the fine thread probe into the Tee adapter:

1. Apply Teflon tape to the nylon reducing bushing that fits into the tee adapter.
2. Begin two threads from the end and apply three wraps of Teflon tape to the nylon reducing bushing.
3. Insert nylon reducing bushing into the tee adapter and tighten just until seated.
4. Apply Teflon tape to the fine thread probe (start two threads from the end).
5. Insert the fine thread probe into the nylon reducing bushing installed in the tee adapter.
6. The tee adapter is assembled with probe for installation.



Select a location where the TX60 transmitter may be installed.


- Protect the TX60 from water and rain as the transmitter is water resistant not water proof.
- Place within range of the wireless gateway (see **Quick Start Manual**).
- If mounts within the control area of the hot tub, mount the transmitter far from the electrical motor that drives the pumps; this avoids electrical noise that may interfere with sending the temperature signal.

TEST the transmitter in the selected mounting location for 1 hour before alterations are made to your property.

- **Check signal reception** to the wireless gateway (view your account).

Select which temperature to monitor:

- Actual water temperature
- Heater water temperature
- Cabinet temperature




Double-check the hose before you install the assembled probe.

- The tee adapter must be installed in a $\frac{3}{4}$ inch hose only.
- $\frac{3}{4}$ inch hose is commonly used on the circulatory pump or the jets. Consult the hot tub/spa owner's manual as needed.
- *Caution!*** some hoses may have static water pressure from the tube being filled. Be prepared to drain the hose if necessary for installation.

Caution! the following steps include making alterations to your hot tub/spa. La Crosse Technology is not responsible for alterations made by the homeowner to their property.

1. Cut the chosen $\frac{3}{4}$ inch hose.
2. Slide one hardware clamp (C) on each end of the cut hose.
3. Insert the tee adapter (D) into each end of the hose.
4. Tighten the hardware clamps.
5. Mount the transmitter in the tested location.
6. Enjoy!



Note: Probes may degrade over time; replacements are available. Simply unplug one end from the TX60 and the other from the Tee assembly; and plug in the new ends appropriately. Probe data may miss a few readings during the exchange.